Roof

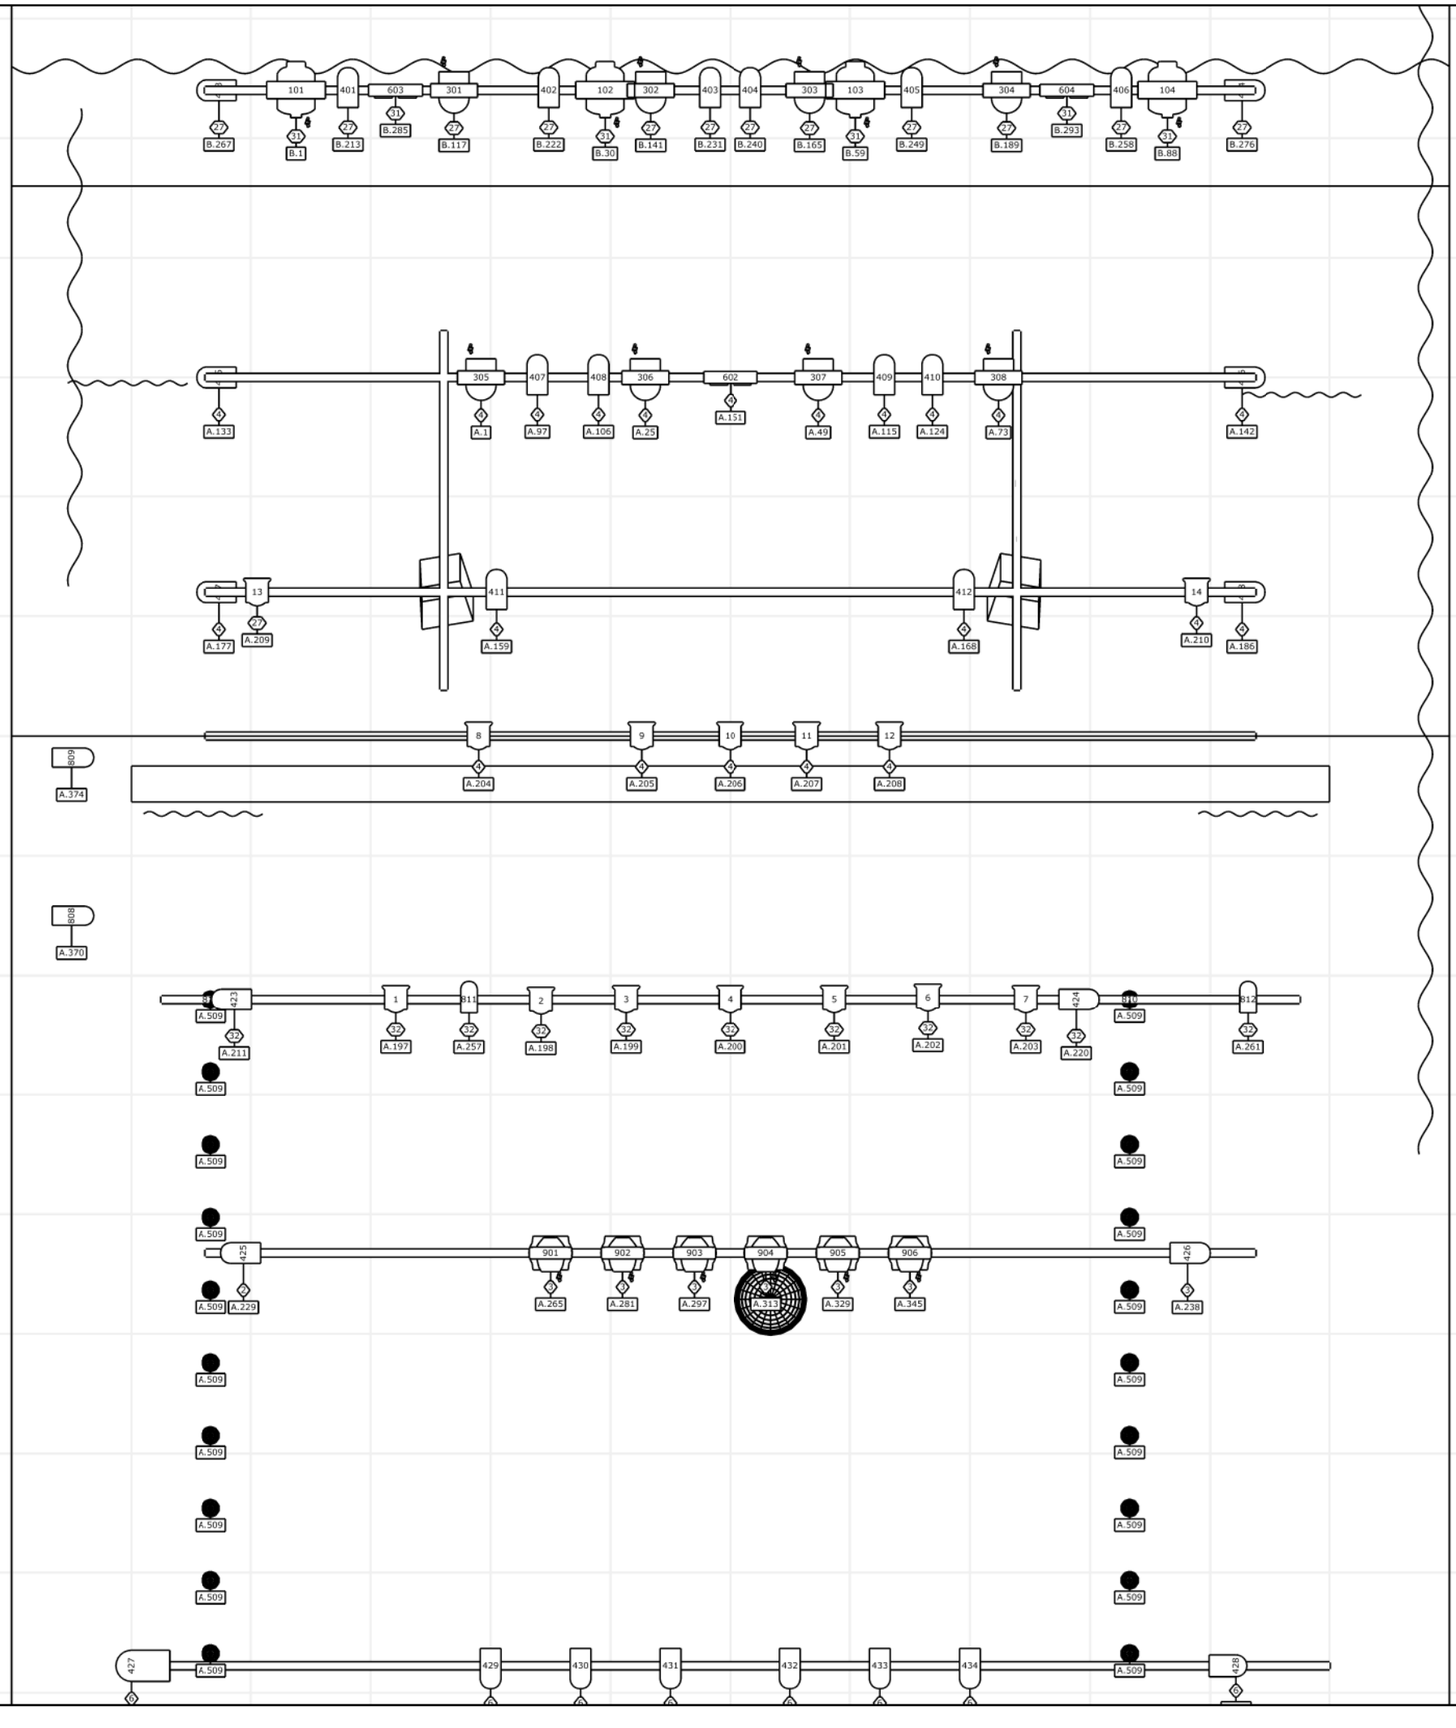

Symbol key

- Q-Par 4, SlimPAR Q12 USB (24)
- BT-Theatre 100EC, BT-Theatre 50WW
- LED TMH-X4 (8)
- Rogue R1 Spot (6)
- Maverick Force X Spot (4)
- Wild Wash 132 LED RGB DMX (3)
- Stage Blinder 2 Blaze (3)
- ComPar Kit Jr. (2)
- Spectral M800 Tour (2)

Theaterbakkerij

UTP location: FOH or stage left
Wired internet connection Stage left or FOH on request only
WiFi internet access available
2 spare UTP cable's run from FOH to stage left

House Lights

Houselights must be used to illumunate the room sufficiently before and after the show (or in between during a break). If the balcony is open this is the only light there and those fixtures should not be used during the show.

Infra

By default we use 2 analog DMX lines with a UTP to 4x XLR splitter (5 pin on console end)

We also have a 2-port Chauvet DJ that can be used.
Data protocol: sACN
House console: GrandMA3 OnPC with 2 15 inch touchscreens
2 Universes - about 300 channels free, across 2 universes
sACN node and all fixtures are run with 3-pin DMX cables.
3>5p 5>3p cables available only on request

ArtNet Settings (to add in guest console)

IP address node: 2.0.0.1

MVR

Capture file and MVR are available on request

Project
Theaterbakkerij

Project location
Gouderaksedijk 24b, Gouda

Floor

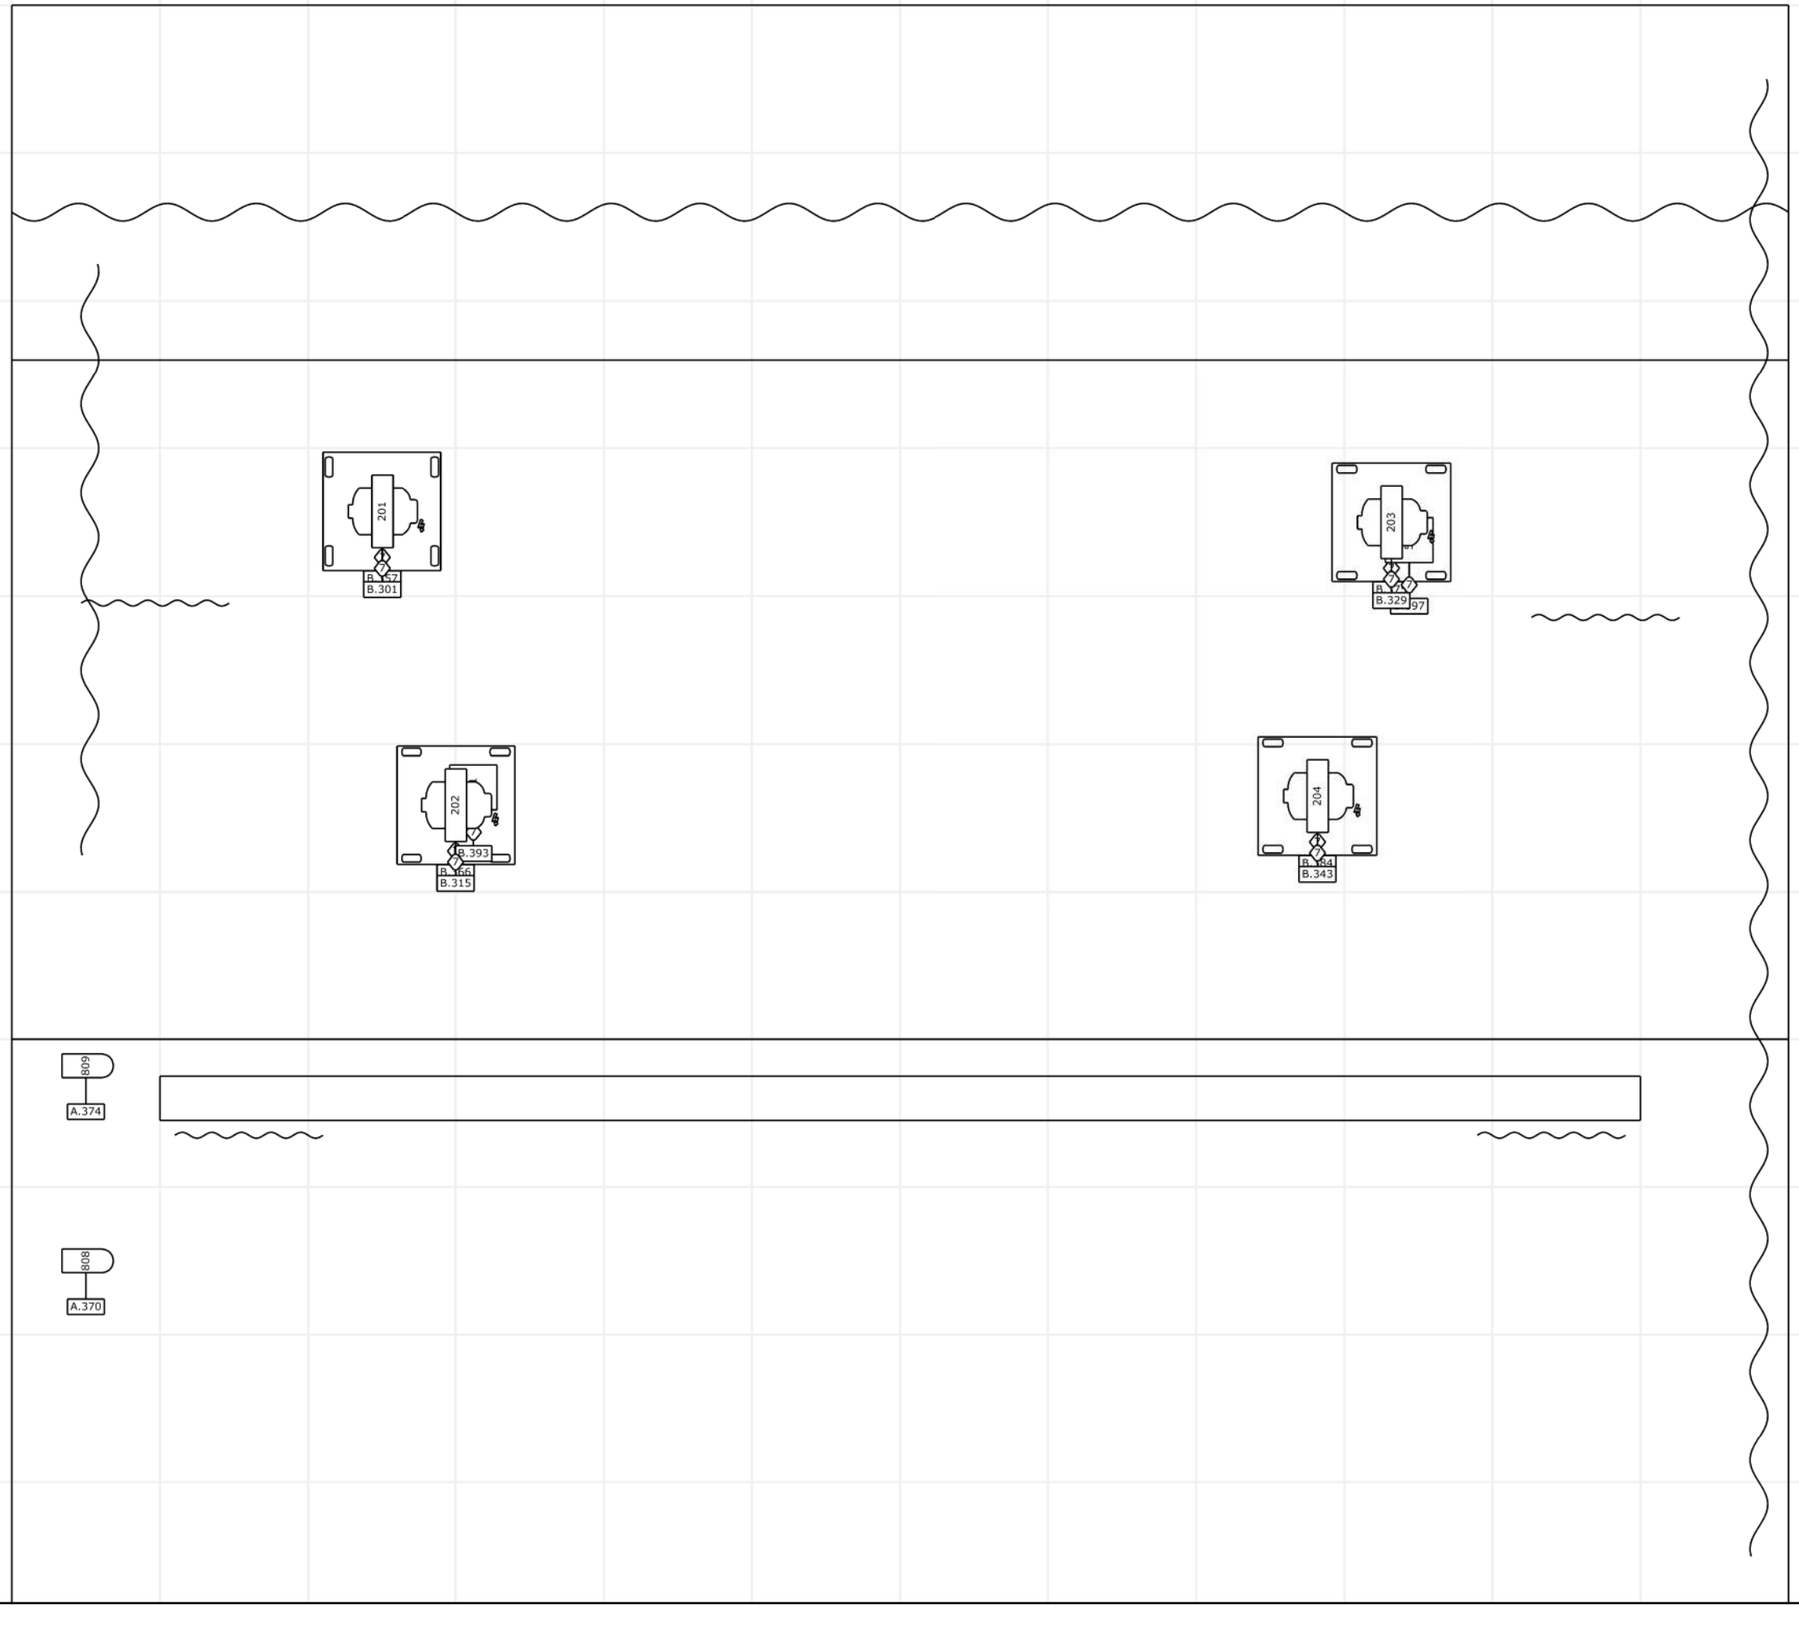

Symbol key

- Intimidator Spot 360 (4)
- SlimPAR Q12 USB (4)
- Cameleon Bar 16 Q4 (2)
- ComPar Kit Jr. (2)

Floor

Every truss pole consists of 1 Chauvet Intimidator spot on the top and a Chauvet Slimpar in the middle of the truss lighting upwards. If you want to take these apart coordinate beforehand.

There are 2 sunstrips which can be placed on the trusses but also on the floor.

You want even more?

- There is DMX switch (no dim!) available with 4 channels

Project
Theaterbakkerij

Project location
Gouderaksedijk 24b, Gouda

Drawing author
Ivan Schouten

Theaterbakkerij Fixture lijst

Gouderaksedijk 24b, Gouda

Fixtures

Unit	Patch	Name	Mode	Circuit	Location	Weight	Rating
1	A.197	Briteq BT-Theatre 50WW	1 Channel 8Bit	32	LX 5	3,6kg	50W
2	A.198	Briteq BT-Theatre 50WW	1 Channel 8Bit	32	LX 5	3,6kg	50W
3	A.199	Briteq BT-Theatre 50WW	1 Channel 8Bit	32	LX 5	3,6kg	50W
4	A.200	Briteq BT-Theatre 50WW	1 Channel 8Bit	32	LX 5	3,6kg	50W
5	A.201	Briteq BT-Theatre 50WW	1 Channel 8Bit	32	LX 5	3,6kg	50W
6	A.202	Briteq BT-Theatre 50WW	1 Channel 8Bit	32	LX 5	3,6kg	50W
7	A.203	Briteq BT-Theatre 50WW	1 Channel 8Bit	32	LX 5	3,6kg	50W
8	A.204	Briteq BT-Theatre 50WW	1 Channel 8Bit	4	LX 4	3,6kg	50W
9	A.205	Briteq BT-Theatre 50WW	1 Channel 8Bit	4	LX 4	3,6kg	50W
10	A.206	Briteq BT-Theatre 50WW	1 Channel 8Bit	4	LX 4	3,6kg	50W
11	A.207	Briteq BT-Theatre 50WW	1 Channel 8Bit	4	LX 4	3,6kg	50W
12	A.208	Briteq BT-Theatre 50WW	1 Channel 8Bit	4	LX 4	3,6kg	50W
13	A.209	Briteq BT-Theatre 100EC	1 Channel Mode	27	LX 4	6,5kg	125W
14	A.210	Briteq BT-Theatre 100EC	1 Channel Mode	4	LX 4	6,5kg	125W
101	B.1	Chauvet Maverick Force X Spot	29 Channel	31	LX 1	20kg	565W
102	B.30	Chauvet Maverick Force X Spot	29 Channel	31	LX 1	20kg	565W
103	B.59	Chauvet Maverick Force X Spot	29 Channel	31	LX 1	20kg	565W
104	B.88	Chauvet Maverick Force X Spot	29 Channel	31	LX 1	20kg	565W
201	B.301	Chauvet DJ Intimidator Spot 360	14 Channel	7		11,4kg	163W
202	B.315	Chauvet DJ Intimidator Spot 360	14 Channel	7		11,4kg	163W
203	B.329	Chauvet DJ Intimidator Spot 360	14 Channel	7		11,4kg	163W
204	B.343	Chauvet DJ Intimidator Spot 360	14 Channel	7		11,4kg	163W
301	B.117	Eurolite LED TMH-X4	24 Channel	27	LX 1	7,8kg	300W
302	B.141	Eurolite LED TMH-X4	24 Channel	27	LX 1	7,8kg	300W
303	B.165	Eurolite LED TMH-X4	24 Channel	27	LX 1	7,8kg	300W
304	B.189	Eurolite LED TMH-X4	24 Channel	27	LX 1	7,8kg	300W
305	A.1	Eurolite LED TMH-X4	24 Channel	4	LX 2	7,8kg	300W
306	A.25	Eurolite LED TMH-X4	24 Channel	4	LX 2	7,8kg	300W
307	A.49	Eurolite LED TMH-X4	24 Channel	4	LX 2	7,8kg	300W
308	A.73	Eurolite LED TMH-X4	24 Channel	4	LX 2	7,8kg	300W
401	B.213	Chauvet DJ SlimPAR Q12 USB	9 Channel	27	LX 1	2,2kg	45W
402	B.222	Chauvet DJ SlimPAR Q12 USB	9 Channel	27	LX 1	2,2kg	45W
403	B.231	Chauvet DJ SlimPAR Q12 USB	9 Channel	27	LX 1	2,2kg	45W
404	B.240	Chauvet DJ SlimPAR Q12 USB	9 Channel	27	LX 1	2,2kg	45W
405	B.249	Chauvet DJ SlimPAR Q12 USB	9 Channel	27	LX 1	2,2kg	45W
406	B.258	Chauvet DJ SlimPAR Q12 USB	9 Channel	27	LX 1	2,2kg	45W

407	A.97	Chauvet DJ SlimPAR Q12 USB	9 Channel	4	LX 2	2,2kg	45W
408	A.106	Chauvet DJ SlimPAR Q12 USB	9 Channel	4	LX 2	2,2kg	45W
409	A.115	Chauvet DJ SlimPAR Q12 USB	9 Channel	4	LX 2	2,2kg	45W
410	A.124	Chauvet DJ SlimPAR Q12 USB	9 Channel	4	LX 2	2,2kg	45W
411	A.159	Chauvet DJ SlimPAR Q12 USB	9 Channel	4	LX 3	2,2kg	45W
412	A.168	Chauvet DJ SlimPAR Q12 USB	9 Channel	4	LX 3	2,2kg	45W
413	B.267	Chauvet DJ SlimPAR Q12 USB	9 Channel	27	LX 1	2,2kg	45W
414	B.276	Chauvet DJ SlimPAR Q12 USB	9 Channel	27	LX 1	2,2kg	45W
415	A.133	Chauvet DJ SlimPAR Q12 USB	9 Channel	4	LX 2	2,2kg	45W
416	A.142	Chauvet DJ SlimPAR Q12 USB	9 Channel	4	LX 2	2,2kg	45W
417	A.177	Chauvet DJ SlimPAR Q12 USB	9 Channel	4	LX 3	2,2kg	45W
418	A.186	Chauvet DJ SlimPAR Q12 USB	9 Channel	4	LX 3	2,2kg	45W
419	B.357	Chauvet DJ SlimPAR Q12 USB	9 Channel	7		2,2kg	45W
420	B.366	Chauvet DJ SlimPAR Q12 USB	9 Channel	7		2,2kg	45W
421	B.375	Chauvet DJ SlimPAR Q12 USB	9 Channel	7		2,2kg	45W
422	B.384	Chauvet DJ SlimPAR Q12 USB	9 Channel	7		2,2kg	45W
423	A.211	Chauvet DJ SlimPAR Q12 USB	9 Channel	32	LX 5	2,2kg	45W
424	A.220	Chauvet DJ SlimPAR Q12 USB	9 Channel	32	LX 5	2,2kg	45W
425	A.229	Chauvet DJ SlimPAR Q12 USB	9 Channel	2	LX 7	2,2kg	45W
426	A.238	Chauvet DJ SlimPAR Q12 USB	9 Channel	3	LX 7	2,2kg	45W
427	A.247	Showtec Spectral M800 Tour	AR1.s	6	LX 8	4,6kg	73W
428	A.252	Showtec Spectral M800 Tour	AR1.s	6	LX 8	4,6kg	73W
429	A.378	Chauvet DJ SlimPAR Q12 USB	9 Channel	6	LX 7	2,2kg	45W
430	A.387	Chauvet DJ SlimPAR Q12 USB	9 Channel	6	LX 7	2,2kg	45W
431	A.396	Chauvet DJ SlimPAR Q12 USB	9 Channel	6	LX 7	2,2kg	45W
432	A.405	Chauvet DJ SlimPAR Q12 USB	9 Channel	6	LX 7	2,2kg	45W
433	A.414	Chauvet DJ SlimPAR Q12 USB	9 Channel	6	LX 7	2,2kg	45W
434	A.423	Chauvet DJ SlimPAR Q12 USB	9 Channel	6	LX 7	2,2kg	45W
501	B.393	Showtec Cameleon Bar 16 Q4	4 Channel	7		6kg	80W
502	B.397	Showtec Cameleon Bar 16 Q4	4 Channel	7		6kg	80W
602	A.151	Showtec Stage Blinder 2 Blaze	8 Channel Mode	4	LX 2	7,3kg	205W
603	B.285	Showtec Stage Blinder 2 Blaze	8 Channel Mode	31	LX 1	7,3kg	205W
604	B.293	Showtec Stage Blinder 2 Blaze	8 Channel Mode	31	LX 1	7,3kg	205W
801	B.510	Chauvet Amhaze Eco	Standard	7		11,4kg	2kW 430W
808	A.370	Ayra ComPar Kit Jr.	4 Channels			3,1kg	36W
809	A.374	Ayra ComPar Kit Jr.	4 Channels			3,1kg	36W
810	A.509	Generic Omnidirectional Bulb	Dimmer			0kg	0W
810	A.509	Generic Omnidirectional Bulb	Dimmer			0kg	0W
810	A.509	Generic Omnidirectional Bulb	Dimmer			0kg	0W
810	A.509	Generic Omnidirectional Bulb	Dimmer			0kg	0W
810	A.509	Generic Omnidirectional Bulb	Dimmer			0kg	0W

810	A.509	Generic Omnidirectional Bulb	Dimmer			0kg	0W
810	A.509	Generic Omnidirectional Bulb	Dimmer			0kg	0W
810	A.509	Generic Omnidirectional Bulb	Dimmer			0kg	0W
810	A.509	Generic Omnidirectional Bulb	Dimmer			0kg	0W
810	A.509	Generic Omnidirectional Bulb	Dimmer			0kg	0W
810	A.509	Generic Omnidirectional Bulb	Dimmer			0kg	0W
810	A.509	Generic Omnidirectional Bulb	Dimmer			0kg	0W
810	A.509	Generic Omnidirectional Bulb	Dimmer			0kg	0W
810	A.509	Generic Omnidirectional Bulb	Dimmer			0kg	0W
810	A.509	Generic Omnidirectional Bulb	Dimmer			0kg	0W
810	A.509	Generic Omnidirectional Bulb	Dimmer			0kg	0W
810	A.509	Generic Omnidirectional Bulb	Dimmer			0kg	0W
810	A.509	Generic Omnidirectional Bulb	Dimmer			0kg	0W
810	A.509	Generic Omnidirectional Bulb	Dimmer			0kg	0W
811	A.257	Ayra Q-Par 4	4 Channel	32	LX 5	2,2kg	40W
812	A.261	Ayra Q-Par 4	4 Channel	32	LX 5	2,2kg	40W
815	A.361	Stairville Wild Wash 132 LED RGB DMX	3 Channel 3		Balkon huislicht	1kg 50g	30W
816	A.364	Stairville Wild Wash 132 LED RGB DMX	3 Channel 3		Balkon huislicht	1kg 50g	30W
817	A.367	Stairville Wild Wash 132 LED RGB DMX	3 Channel 3		Balkon huislicht	1kg 50g	30W
901	A.265	Chauvet Rogue R1 Spot	16 Channel Mode	3	LX 7	16,3kg	225W
902	A.281	Chauvet Rogue R1 Spot	16 Channel Mode	3	LX 7	16,3kg	225W
903	A.297	Chauvet Rogue R1 Spot	16 Channel Mode	3	LX 7	16,3kg	225W
904	A.313	Chauvet Rogue R1 Spot	16 Channel Mode	3	LX 7	16,3kg	225W
905	A.329	Chauvet Rogue R1 Spot	16 Channel Mode	3	LX 7	16,3kg	225W
906	A.345	Chauvet Rogue R1 Spot	16 Channel Mode	3	LX 7	16,3kg	225W
						480kg 650g	12kW 545W